


TO TEST GND FUNCTION ON RZ-2 PROGRAMMER WITH 3-WIRE GND MOVE CT COMMON WIRE TO GF2 TERMINAL AND JUMPER GF1 TERMINAL TO CO TERMINAL.

TO DEFEAT GF MOVE CT COMMON WIRE TO CO TERMINAL AND JUMPER GF1 TERMINAL TO CO TERMINAL.

TO SET BREAKER UP FOR 4-WIRE GND MOVE CT COMMON WIRE TO CO TERMINAL AND JUMPER GF1 TERMINAL TO CO TERMINAL.
WIRE GF1 TO F SECONDARY AND GF2 TO E SECONDARY.

SECONDARY LABELED FROM A-F FROM BOTTOM TO TOP.

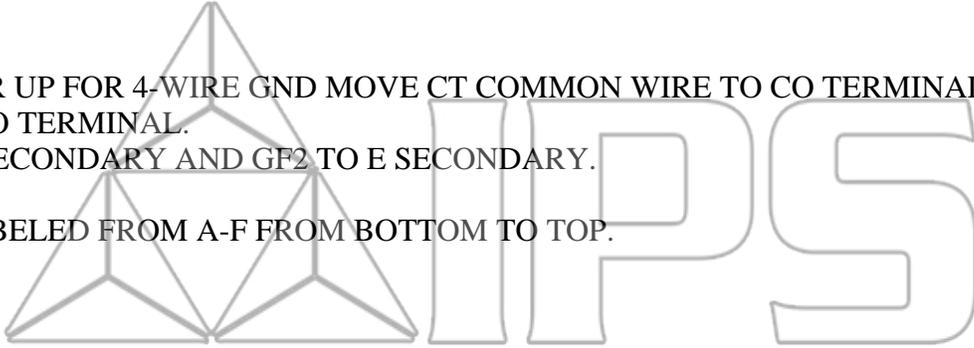

store.ips.us